


Coaxial PCB Connector 85_SMB-50-0-1/111_N

Description

Right angle PCB jack

Interface Standards

IEC 60169-10_MIL-STD-348A/311_CECC 22130

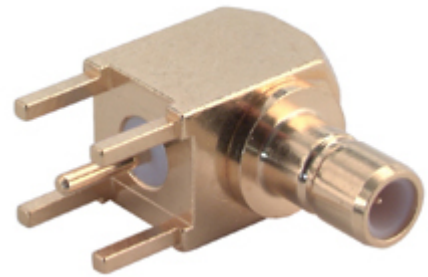

Technical Data

Electrical Data

| | |
|--------------------------|-------|
| Impedance | 50 Ω |
| Interface frequency max. | 4 GHz |

Mechanical Data

| | |
|---------------------|---------------|
| Board mounting type | through holes |
| Weight | 0.0029 kg |

Environmental Data

| | |
|------------------------------------------------------|------------------|
| Operating temperature | -65 °C to 165 °C |
| 2011/65/EU (RoHS - including 2015/863 and 2017/2102) | compliant |

Material Data

| Piece Parts | Material | Surface Plating |
|----------------|------------|-----------------------------------|
| Centre contact | Brass | Gold Plating (Nickel underplated) |
| Outer contact | Brass | Gold Plating (Nickel underplated) |
| Body | Brass | Gold Plating (Nickel underplated) |
| Insulator | PFA / PTFE | |

Related Documents

| | |
|-------------------|--------------|
| Outline drawing | DOU-00012763 |
| Catalogue drawing | DCA-00012809 |

Ordering Information

| | |
|----------------------|----------------------|
| Single package | 85_SMB-50-0-1/111_NE |
| Bulk 100 pcs package | 85_SMB-50-0-1/111_NH |

Remarks

PCB connector with stand-offs