


## Coaxial PCB Connector 85\_QMA-50-0-3/111\_N

### Description

Right angle PCB jack

Interface Standards  
QMA QLF compliant

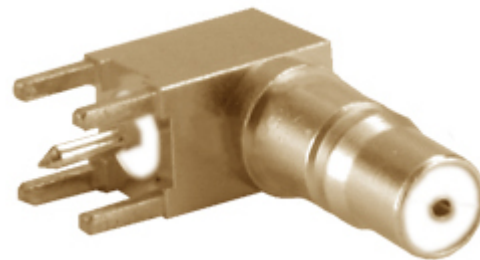

### Technical Data

#### Electrical Data

|                          |             |
|--------------------------|-------------|
| Impedance                | 50 $\Omega$ |
| Interface frequency max. | 6 GHz       |

#### Mechanical Data

|                     |               |
|---------------------|---------------|
| Board mounting type | through holes |
| Weight              | 0.0041 kg     |

#### Environmental Data

|                       |                 |
|-----------------------|-----------------|
| Operating temperature | -40 °C to 85 °C |
| 2011/65/EU (RoHS)     | compliant       |

#### Material Data

| Piece Parts    | Material                  | Surface Plating |
|----------------|---------------------------|-----------------|
| Centre contact | Copper Beryllium / Bronze | SUCOPRO Plating |
| Outer contact  | Brass                     | SUCOPRO Plating |
| Body           | Brass                     | SUCOPRO Plating |
| Insulator      | PFA / PTFE                |                 |

### Related Documents

|                   |              |
|-------------------|--------------|
| Outline drawing   | DOU-00012659 |
| Catalogue drawing | DCA-00012661 |
| Mounting hole     | DOU-00002524 |

### Ordering Information

|                      |                      |
|----------------------|----------------------|
| Bulk 100 pcs package | 85_QMA-50-0-3/111_NH |
|----------------------|----------------------|

### Remarks

PCB connector with stand-offs